

Design of Fuzzy IMM Algorithm based on Basis Sub-models and Time-varying Mode Transition Probabilities

Hyun-Sik Kim and Seung-Yong Chun

Abstract: In the real system application, the interacting multiple model (IMM) based algorithm requires less computing resources as well as a good performance with respect to the various target maneuverings. And it further requires an easy design procedure in terms of its structures and parameters. To solve these problems, a fuzzy interacting multiple model (FIMM) algorithm, which is based on the basis sub-models defined by considering the maneuvering property and the time-varying mode transition probabilities designed by using the mode probabilities as inputs of a fuzzy decision maker, is proposed. To verify the performance of the proposed algorithm, airborne target tracking is performed. Simulation results show that the FIMM algorithm solves all problems in the real system application of the IMM based algorithm.

Keywords: Basis sub-models, fuzzy interacting multiple model algorithm, maneuvering target tracking, time-varying mode transition probabilities.

1. INTRODUCTION

The Kalman filter, which is well known as a recursive estimator based on optimal filter theory, has been widely used in target tracking. However, in the case that a single filter is used for maneuvering target tracking, its performance becomes inferior. For this reason, many kinds of Kalman filters have been studied in order to solve this problem. Among them, the interacting multiple model (IMM) algorithm is recognized to have a good performance although it is a sub-optimal filter [1-4]. In the IMM algorithm, if the target maneuvering is similar to the output of a sub-model, the tracking error is small; otherwise, the error is big. For this reason, it requires many sub-model numbers in order to have a good performance with respect to the various target maneuverings. But it is not reasonable to use the algorithm with too many computing resources in the real system application.

To solve this problem, various IMM based algorithms have been suggested. Munir [5] proposed the algorithm that has sub-models determined by the estimated acceleration. Although it has a small number of sub-models as well as a good performance, it has difficulty in determining the acceleration levels according to the maneuvering property. Wang [6] proposed the algorithm that has sub-models whose process noise variances are adjusted by the fuzzy

system. Although it has a small number of sub-models as well as a good performance, it has a difficulty in determining the fuzzy system according to the expert knowledge. As well, Lee [7] proposed the algorithm that has three optimal sub-models whose parameters are adjusted by the genetic algorithm (GA). Although it has a small number of sub-models as well as a good performance, it still has a computational burden in optimizing sub-models by the GA. However, the performance of the IMM algorithm depends on the mode transition probabilities as well as the sub-models, i.e., if the mode transition probabilities are adjusted, the performance of the IMM algorithm is better than that of the conventional IMM algorithm. The performance of the IMM algorithm depends on the mode transition probabilities as well as the sub-models, i.e., if the mode transition probabilities are adjusted, the performance of the IMM algorithm is better than that of the conventional IMM algorithm. Campo [8] proposed the algorithm that adjusts the mode transition probabilities by the sojourn time dependent Markov model switching. Although it has superior performance, it has difficulty in determining the design parameters.

To resolve these problems, a fuzzy interacting multiple model (FIMM) algorithm, which is based on the basis sub-models defined by considering the maneuvering property and the time-varying mode transition probabilities designed by using the mode probabilities as inputs of a fuzzy decision maker, is proposed.

The design procedure of the FIMM algorithm encompasses the following contents: the practical definition method of the basis sub-models defined by

Manuscript received June 14, 2005; revised March 30, 2006; accepted June 12, 2006. Recommended by Editor Jae Weon Choi.

Hyun-Sik Kim and Seung-Yong Chun are with the Agency for Defense Development, P.O. Box 18, Jinhae, Gyeongnam 645-600, Korea (e-mails: {hskimm, sychun}@add.re.kr).

considering the maneuvering property; and the detailed design method of the time-varying mode transition probabilities designed by using the mode probabilities as inputs of a fuzzy decision maker.

The proposed algorithm has four major advantages: 1) it has less computing resources because the number of the basis sub-models is determined by the maneuvering property 2) it has good performance because the mode transition probabilities are adjusted by the fuzzy decision maker 3) it has a simple fuzzy partition with a small number of parameters and a simple fuzzy rule that has the small rule number because the mode probabilities are normalized values and the sum of them is 1.0, and 4) it easily extends the simplified fuzzy reasoning method [9,10] because the mode transition probabilities have the form of a matrix.

The IMM algorithm is introduced in Section 2. The design of the FIMM algorithm is described in Section 3, and the simulation results of the FIMM algorithm with respect to the various target maneuverings are presented in Section 4. Finally, the conclusions are summarized in Section 5.

2. IMM ALGORITHM

In this section, the main elements of the IMM algorithm, which is based on the Kalman filter, are introduced.

The IMM algorithm is recognized to have a good performance with respect to the various target maneuverings although it is a sub-optimal filter based on the Markov chain whose transition depends on the latest state. The detail contents are well explained in [3], and the main elements of the IMM algorithm are as follows:

The mode transition probabilities, which are related to the Markov chain, are defined as

$$p_{ij} = P\{M_j(k)|M_i(k-1)\} = \begin{bmatrix} p_{11} & p_{12} & \cdots & p_{1j} \\ p_{21} & p_{22} & \cdots & p_{2j} \\ \vdots & \vdots & \ddots & \vdots \\ p_{i1} & p_{i2} & \cdots & p_{ij} \end{bmatrix}, \quad (1)$$

where $i, j=1, \dots, r$ and r is number of sub-models.

In addition, the merging probability is defined as

$$\mu_{ij}(k-1|k) = \frac{1}{c_j} p_{ij} \mu_i(k-1), \quad (2)$$

where c_j is the normalization constant of the j -th sub-model.

$$c_j = \sum_{i=1}^r p_{ij} \mu_i(k-1). \quad (3)$$

And then, the mixed state and the state covariance are defined as

$$\hat{\mathbf{x}}_0^j(k|k) = \sum_{i=1}^r \hat{\mathbf{x}}^i(k|k) \mu_{ij}(k-1|k), \quad (4)$$

$$\mathbf{P}_0^j(k|k) = \sum_{i=1}^r \mu_{ij}(k-1|k) \left\{ \mathbf{P}^i(k|k) + [\hat{\mathbf{x}}^i(k|k) - \hat{\mathbf{x}}_0^i(k|k)] [\hat{\mathbf{x}}^i(k|k) - \hat{\mathbf{x}}_0^i(k|k)]^T \right\}, \quad (5)$$

where $\hat{\mathbf{x}}^i(k|k)$ is the state vector at the scan k .

Also, the mode probability is defined as

$$\mu_j(k) = \frac{1}{c} \Lambda_j(k) c_j, \quad (6)$$

where c is a normalization constant.

$$c = \sum_{j=1}^r \Lambda_j(k) c_j, \quad (7)$$

and $\Lambda_j(k)$ is a likelihood function defined as

$$\Lambda_j(k) = \frac{1}{\sqrt{(2\pi)^{n_z} |S_j(k)|}} \exp\left(-\frac{1}{2} \mathbf{v}_j^T(k) S_j^{-1}(k) \mathbf{v}_j(k)\right), \quad (8)$$

$\mathbf{v}_j(k) = \mathbf{z}(k) - \hat{\mathbf{z}}_j(k-1|k)$, $S_j(k)$ is the innovation covariance that includes the measurement covariance, and n_z is the dimension of measurement vector $\mathbf{z}(k)$.

Finally, the combined state and the state covariance are defined as

$$\hat{\mathbf{x}}(k|k) = \sum_{j=1}^r \hat{\mathbf{x}}^j(k|k) \mu_j(k), \quad (9)$$

$$\mathbf{P}(k|k) = \sum_{j=1}^r \mu_j(k) \left\{ \mathbf{P}^j(k|k) + [\hat{\mathbf{x}}^j(k|k) - \hat{\mathbf{x}}(k|k)] [\hat{\mathbf{x}}^j(k|k) - \hat{\mathbf{x}}(k|k)]^T \right\}. \quad (10)$$

From the above mentioned equations, we note that the performance of the IMM algorithm depends on the mode transition probabilities as well as the sub-models, i.e., if the target maneuvering is similar to the output of a sub-model, the tracking error is small; otherwise, the error is relatively big; and if the values of a column in (1) are increased, the corresponding sub-model is strongly reflected in generating the

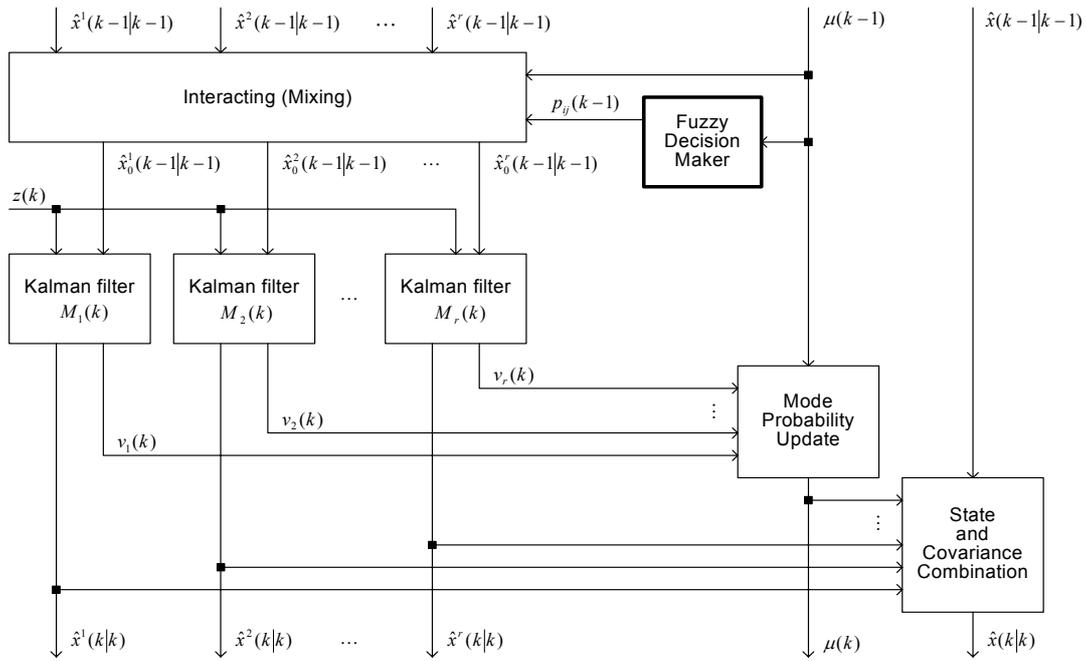


Fig. 1. FIMM algorithm (one cycle).

combined state in (9); if the values of all columns are equally assigned, all sub-models are equally reflected.

3. DESIGN OF FIMM ALGORITHM

In this section, a FIMM algorithm, which is based on the basis sub-models defined by considering the maneuvering property and the time-varying mode transition probabilities designed by using the mode probabilities as inputs of a fuzzy decision maker, is designed.

The one cycle FIMM algorithm that has the fuzzy decision maker is shown in Fig. 1.

The detail design procedure of the FIMM algorithm is divided into the following two phases:

In the first phase of the design procedure, the practical definition method of the basis sub-models, which is defined by considering the maneuvering property, is described as follows:

Generally, the maneuvering property can be expressed by

$$\text{Maneuvering Property} = f(v, a, \omega, T, \sigma_w), \quad (11)$$

where v is the target speed, a is the target acceleration, ω is the target angular velocity, T is the sampling period, and σ_w is the standard deviation of the measurement noise.

In addition, the kinematic models can be divided into four types: a constant velocity (CV) model, a singer (SG) model [4], a constant acceleration (CA) model, and a coordinated turn (CT) model.

However, if the maneuvering property and the kinematic models are considered in the definition of

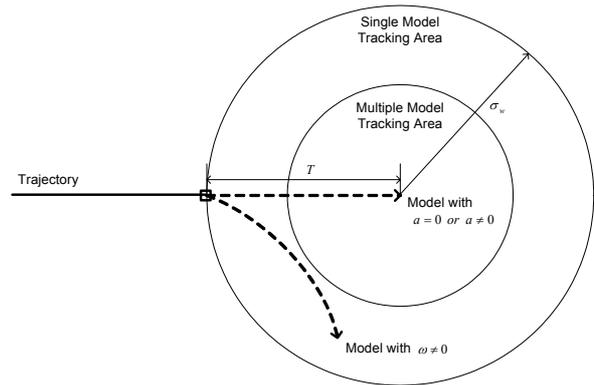


Fig. 2. Sub-model definition method.

sub-models by designer, the definition is executed by the method that is shown in Fig. 2.

This method explains that the maneuvering property is closely related with elements such as the target speed, target acceleration, target angular velocity, sampling period, and standard deviation of the measurement noise, i.e., if the sampling period is small or the measurement noise is large, the number of sub-models can be reduced because some unnecessary sub-models may exist.

According to the analysis of the above mentioned definition method, the kinematic models can be interpreted as the acceleration models that have different acceleration rates and axis-coupling rates as follows:

$$CV < SG \leq CA < CT. \quad (12)$$

This relation implies that SG and CA models can be unnecessary sub-models because they can be made by

the weighted sum of the CV and CT models that can be candidates for the basis sub-models. And the ω of the CT model can be determined as the maximum tuning rate of the desired target, which is generally known although its tuning direction is not known.

Therefore, two basis sub-models composed of CV model and CA model can be sufficient for tracking of the vertical maneuvering target and three basis sub-models composed of one CV model and two CT models can be sufficient for tracking of the horizontal maneuvering target in the horizontal plane.

Consequently, the number of the basis sub-models is small. Note that it solves the problem of less computing resources in the real system application of the IMM based algorithm.

In the second phase of the design procedure, the detailed design method of the time-varying mode transition probabilities, which is designed by using the mode probability as inputs of a fuzzy decision maker, is described as follows:

To adjust the mode transition probabilities in (1), the performance index is needed for evaluating each sub-model. However, the mode probability plays a role in evaluating each sub-model because the mode probability in (6) includes the likelihood function in (8). Therefore, the mode probability is used as a fuzzy input.

The fuzzy partition that has five bell-shaped membership functions is shown in Fig. 3.

This partition has the membership function that is defined as

$$f_i(\mu_j) = \exp\left[-\left(\frac{\mu_j - c_i}{\sigma_i}\right)^2\right], \quad (13)$$

where μ_j is the mode probability of j -th sub-model, c_i and σ_i are respectively the center and width of i -th membership function.

In addition, it employs the facts that the mode probabilities in (6) are normalized values and the sum of them is 1.0. This is directly related with using the mode probabilities as fuzzy inputs. From these facts, the centers of DB and RB membership functions are respectively set to 1.0 and 0.0, and the center of ZO membership function is easily set to

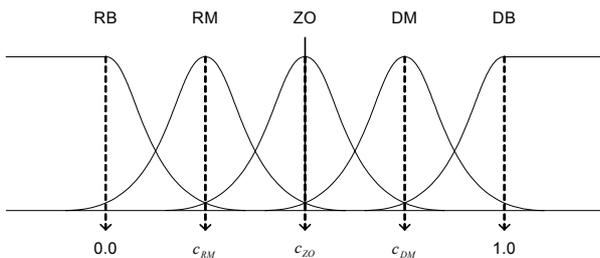


Fig. 3. Fuzzy partition for FIMM.

$$c_{ZO} = 1/r. \quad (14)$$

And the center of DM membership function is properly set by considering the similarity of sub-models, i.e., if the degree of similarity between sub-models is high, c_{DM} is close to c_{ZO} ; otherwise, it is far from c_{ZO} . Then, the center of RM membership functions is set by the above mentioned facts:

$$c_{RM} = (1 - c_{DM}) / (r - 1). \quad (15)$$

And the widths of the membership functions are equally set for the design simplicity:

$$\sigma_i = \sigma. \quad (16)$$

(16) should be properly set in order to let the partition have a meaning in terms of a continuous overlap of the membership functions.

Therefore, the fuzzy partition has both simple structure and two design parameters of c_{DM} and σ .

The fuzzy reasoning method employs the simplified method whose consequent part has a constant value. Therefore, it easily extends a constant value to a matrix because the mode transition probabilities have the form of a matrix.

The fuzzy rule has the following form:

$$R^n : \text{if } \mu_1 \text{ is } A_1 \text{ and } \mu_2 \text{ is } A_2 \text{ and } \dots \text{ and } \mu_r \text{ is } A_r, \text{ then } p_{ij} = p_{ij}^n, \quad (17)$$

where R^n ($n = 0, 1, 2, \dots, r$) denotes the n -th fuzzy rule, A_j denotes the membership function of the j -th sub-model, and p_{ij}^n that comprises the fuzzy consequent part is expressed by

$$p_{ij}^n = \begin{bmatrix} c_1 & c_2 & \dots & c_j \\ c_1 & c_2 & \dots & c_j \\ \vdots & \vdots & \ddots & \vdots \\ c_1 & c_2 & \dots & c_j \end{bmatrix}, \quad (18)$$

where

$$c_j = \begin{cases} 1/r, & n = 0 \\ c_{\max}, & n \neq 0 \text{ and } j = n \\ (1 - c_{\max}) / (r - 1), & n \neq 0 \text{ and } j \neq n. \end{cases} \quad (19)$$

Therefore, the fuzzy reasoning method has both a simple structure and an one design parameter of c_{\max} .

The fuzzy rule for tracking of the maneuvering target in a horizontal plane has four rules that are expressed by

$$R^0 : \text{if } \mu_1 \text{ is } ZO \text{ and } \mu_2 \text{ is } ZO \text{ and } \mu_3 \text{ is } ZO \text{ then } p_{ij} = p_{ij}^0,$$

R^1 : if μ_1 is bigger than DM and μ_2 is smaller than RM and μ_3 is smaller than RM then

$$p_{ij} = p_{ij}^1,$$

R^2 : if μ_2 is bigger than DM and μ_3 is smaller than RM and μ_1 is smaller than RM then

$$p_{ij} = p_{ij}^2,$$

R^3 : if μ_3 is bigger than DM and μ_1 is smaller than RM and μ_2 is smaller than RM then

$$p_{ij} = p_{ij}^3.$$

(20)

These rules include the following rules: if the dominant model exists, the values of the corresponding column in (1) are increased in order to strongly reflect the corresponding sub-model in generating the combined state in (9); otherwise, the values of all columns are equally assigned in order to uniformly reflect all sub-models. It enables that the adjusted mode transition probabilities are expressed by the form of the weighted sum of the consequent parts.

Therefore, the fuzzy rule has both simple structure and the rule number of $r+1$.

The fuzzy defuzzification is expressed by the following form:

$$p_{ij}(k) = \frac{\sum_{n=1}^l w_n p_{ij}^n}{\sum_{n=1}^l w_n}, \quad (21)$$

where

$$w_n = \prod_{i=1}^r m_{A_i}(\mu_i(k-1)). \quad (22)$$

This fuzzy decision maker replaces the time-invariant p_{ij} in (1)-(3) to the time-varying $p_{ij}(k)$ in (21). It enables to let the FIMM algorithm have better performance than that of the conventional IMM algorithm.

Consequently, the fuzzy decision maker has simple structures and fewer design parameters as well as a good performance. Note that they solve the problems of both a good performance and an easy design procedure in the real system application of the IMM based algorithm.

From the above mentioned procedure, the FIMM algorithm, which is based on the basis sub-models defined by considering the maneuvering property and the time-varying mode transition probabilities designed by using the mode probabilities as inputs of a fuzzy decision maker, has been designed.

4. SIMULATION RESULTS

The performance of the FIMM algorithm is tested with the problem of tracking an airborne target that is moving, which is described by the constant velocity flight and the coordinated turn flight in the horizontal plane. This was also shown in [11,12].

The process equations, which are related to the constant velocity flight and the coordinated turn flight of the airborne target, are defined as

$$\mathbf{x}(k+1) = \begin{bmatrix} 1 & T & 0 & 0 \\ 0 & 1 & 0 & 0 \\ 0 & 0 & 1 & T \\ 0 & 0 & 0 & 1 \end{bmatrix} \mathbf{x}(k) + \begin{bmatrix} T^2/2 \\ T \\ T^2/2 \\ T \end{bmatrix} \mathbf{v}(k), \quad (23)$$

$$\mathbf{x}(k+1) = \begin{bmatrix} 1 & \sin \omega T / \omega & 0 & -(1 - \cos \omega T) / \omega \\ 0 & \cos \omega T & 0 & -\sin \omega T \\ 0 & (1 - \cos \omega T) / \omega & 1 & \sin \omega T / \omega \\ 0 & \sin \omega T & 0 & \cos \omega T \end{bmatrix} \mathbf{x}(k) + \begin{bmatrix} T^2/2 \\ T \\ T^2/2 \\ T \end{bmatrix} \mathbf{v}(k). \quad (24)$$

The state vector is defined as

$$\mathbf{x}(k) = [\xi \quad \dot{\xi} \quad \eta \quad \dot{\eta}]^T, \quad (25)$$

where ξ and $\dot{\xi}$ are respectively the position and velocity of the target with respect to the x-axis, and η , $\dot{\eta}$ are respectively the position and velocity of the target with respect to the y-axis.

The measurement equation is defined as

$$\mathbf{z}(k) = \begin{bmatrix} 1 & 0 & 0 & 0 \\ 0 & 0 & 1 & 0 \end{bmatrix} \mathbf{x}(k) + \mathbf{w}(k). \quad (26)$$

The simulation scenario of the maneuvering target is designed as follows:

A nonmaneuvering flight during scan 1 to 20 with a speed of 300 m/s; a 180° turning flight during scan 21 to 33 with a turning rate of 3.74°/s (2g acceleration); a nonmaneuvering flight during scan 34 to 53; a -180° turning flight during scan 54 to 66 with a turning rate of -3.74°/s; a nonmaneuvering flight during scan 67 to 86; a 180° turning flight during scan 87 to 112 with a turning rate of 1.87°/s; finally, a nonmaneuvering flight during scan 113 to 132.

In order to compare the proposed FIMM algorithm with conventional IMM algorithms, an IMM1 with no knowledge and an IMM2 with a heuristic knowledge

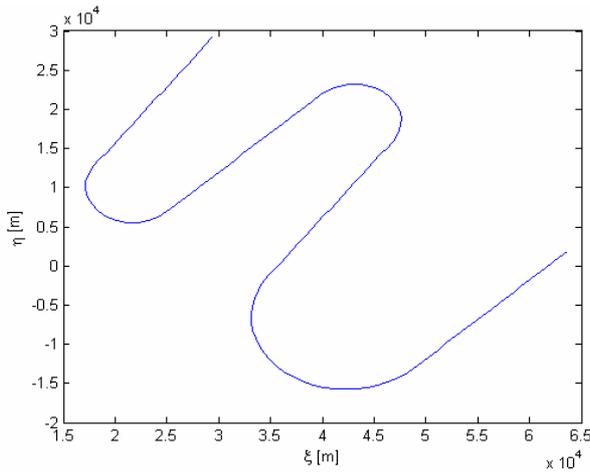


Fig. 4. True trajectory of maneuvering target.

are considered. The initial state of the target in Cartesian coordinates is determined by

$$\mathbf{x}(0) = [30000 \quad -172 \quad 30000 \quad -246]^T.$$

The process noise of the true system is zero and the true trajectory is shown in Fig. 4.

The sampling period of the sensor system is determined by $T = 3.5$. The standard deviation of measurement noise in the sensor system is determined by $\sigma_w = 30.0$.

In order to track the target, the number of sub-models is $r = 3$, which is determined by

$$\mathbf{M} = [\omega_1 = 0, \quad \omega_2 = 2g, \quad \omega_3 = -2g]^T.$$

The noise covariance is

$$\mathbf{Q} = \begin{bmatrix} T^4/4 & T^3/2 & 0 & 0 \\ T^3/2 & T^2/2 & 0 & 0 \\ 0 & 0 & T^4/4 & T^3/2 \\ 0 & 0 & T^3/2 & T^2/2 \end{bmatrix} \sigma_v^2, \quad (27)$$

where $\sigma_v = 0.004$.

The standard deviation of measurement noise in the filter is the same as the sensor system.

The above parameters are equally applied to all algorithms. The other parameters are given in Table 1.

The performance of the FIMM is tested by 100

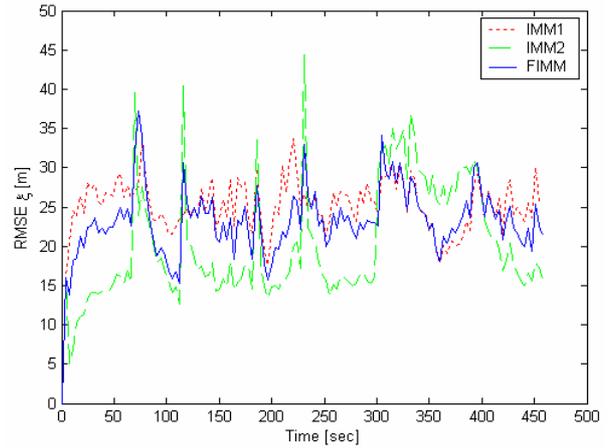


Fig. 5. RMSE of target position (ξ -axis).

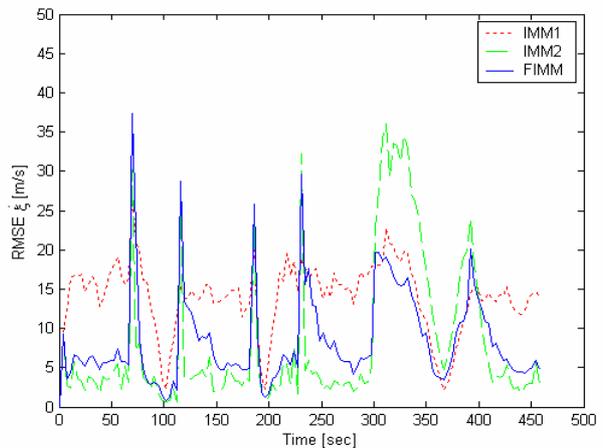


Fig. 6. RMSE of target velocity (ξ -axis).

times Monte Carlo simulation. The results are shown in Figs. 5-9. These are the root of mean square error (RMSE), which is expressed by

$$RMSE = \sqrt{\frac{1}{N} \sum_{j=1}^N (\mathbf{x}(k) - \hat{\mathbf{x}}^j(k)) (\mathbf{x}(k) - \hat{\mathbf{x}}^j(k))^T}. \quad (28)$$

Figs. 5 and 6 respectively show the RMSE of target position and velocity with respect to ξ -axis. And Figs. 7 and 8 respectively show the RMSE of target position and velocity with respect to η -axis. While the performances of all algorithms have the total relation of $IMM1 \ll FIMM < IMM2$ in the case

Table 1. Parameters of algorithms.

	IMM1	IMM2	FIMM
IMM's	$\mathbf{p}_{ij} = \begin{bmatrix} 0.33 & 0.33 & 0.33 \\ 0.33 & 0.33 & 0.33 \\ 0.33 & 0.33 & 0.33 \end{bmatrix}$	$\mathbf{p}_{ij} = \begin{bmatrix} 0.95 & 0.05 & 0.05 \\ 0.025 & 0.70 & 0.25 \\ 0.025 & 0.25 & 0.70 \end{bmatrix}$	$\mathbf{p}_{ij}(0) = \begin{bmatrix} 0.33 & 0.33 & 0.33 \\ 0.33 & 0.33 & 0.33 \\ 0.33 & 0.33 & 0.33 \end{bmatrix}$
Fuzzy's	-	-	$c_{DM} = 0.66, \quad \sigma = 0.33, \quad c_{\max} = 0.98$

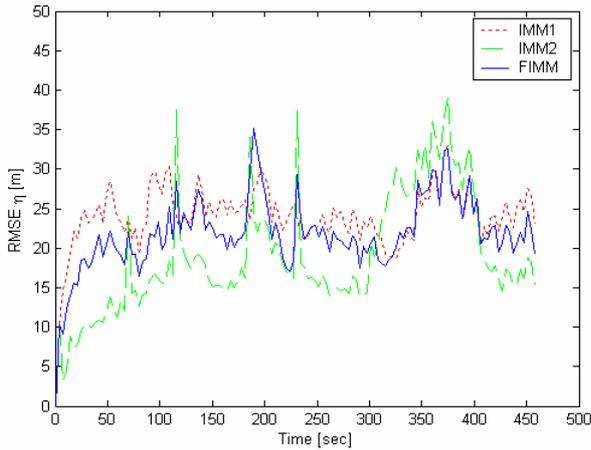


Fig. 7. RMSE of target position (η -axis).

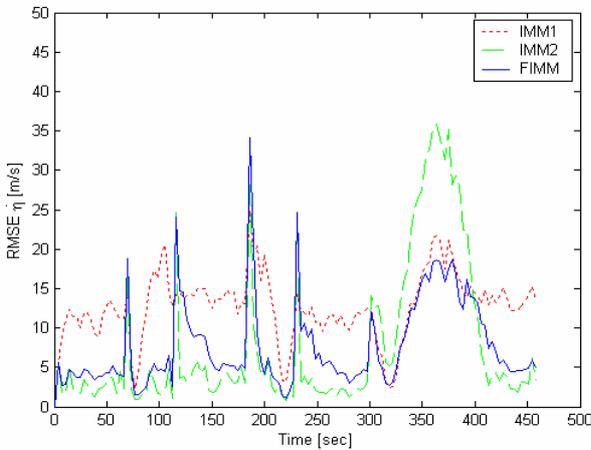


Fig. 8. RMSE of target velocity (η -axis).

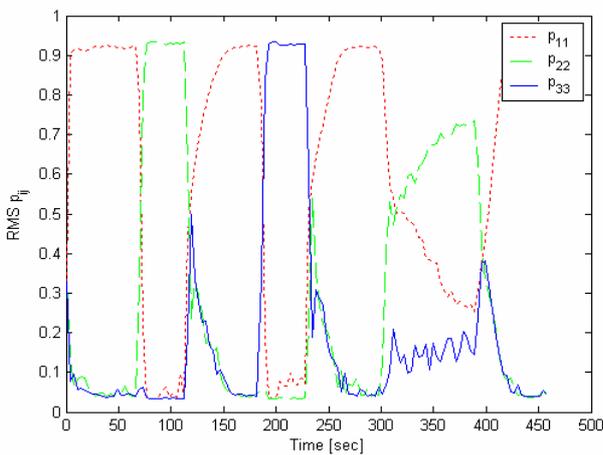


Fig. 9. RMS value of mode transition probabilities.

that a considerably dominant sub-model exists, they have the total relation of $IMM2 \ll IMM1 < FIMM$ in the case that an inconsiderably dominant sub-model exists during scan 87 to 112. These are caused by the facts that the FIMM has the time-varying probabilities while the IMM1 and IMM2 have the time-invariant

Table 2. Comparison of performances and CPU time.

	ξ	$\dot{\xi}$	η	$\dot{\eta}$	CPU time [sec]
IMM1	24.785	13.614	24.066	12.793	0.0048
IMM2	23.854	13.246	22.749	13.035	0.0048
FIMM	23.873	9.773	22.691	9.272	0.0063

probabilities. These mean that FIMM is most robust with respect to the overall target maneuvering because the basis sub-model in (12) and fuzzy decision maker in (21) act well.

Table 2 shows the numerical comparison of the FIMM and the conventional IMM algorithms. Each element is the average value of both the average value of RMSE in the case that an inconsiderably dominant sub-model exists and the average value of RMSE in the case that a considerably dominant sub-model exists. In terms of the performances, the position performances of the FIMM are better than the other algorithms. Especially, the velocity performances of the FIMM are superior to the other algorithms. And in terms of one cycle computing resources, the fuzzy decision maker of the FIMM requires the computing resource that is equivalent to that of one sub-model of the conventional IMM algorithm. Therefore, the FIMM algorithm requires the computing resources of $r+1$ sub-models while the other algorithms can require the computing resources of more than $2r$ sub-models in order to obtain the same performances in general.

These values quantitatively verify the fact that FIMM is most effective and robust with respect to the overall target maneuvering.

Fig. 9 shows the RMS value of the mode transition probabilities in (21). The FIMM algorithm is effectively adjusting the mode transition probabilities with respect to the change of the target maneuvering. In the case that a dominant sub-model exists, the values of the corresponding column in (1) are increased in order to strongly reflect the corresponding sub-model in generating the combined state in (9); otherwise, the values of all columns are equally assigned in order to equally reflect all sub-models.

Although the comparisons are not executed under the same conditions with respect to the IMM based algorithms because there does not yet exist the algorithm capable of solving all the problems in the real system application of the IMM based algorithm, they show well that the FIMM algorithm has meaningful terms.

5. CONCLUSIONS

In this paper, the fuzzy interacting multiple model

algorithm, which is based on the basis sub-models defined by considering the maneuvering property and the time-varying mode transition probabilities designed by using the mode probabilities as inputs of a fuzzy decision maker, has been proposed.

In the first phase of the design procedure, the practical definition method of the basis sub-models defined by considering the maneuvering property has been described in order to allow the algorithm to have fewer computing resources.

In the second phase of the design procedure, the detailed design method of the time-varying mode transition probabilities designed by using the mode probability as the input of the fuzzy decision maker has been described in order to let the algorithm have both a good performance and an easy design procedure.

The proposed algorithm has four major advantages: 1) it has less computing resources because the number of the basis sub-models is determined by the maneuvering property 2) it has a good performance because the mode transition probabilities are adjusted by the fuzzy decision maker 3) it has a simple fuzzy partition that has a small number of parameters and a simple fuzzy rule that has the small rule number because the mode probabilities are normalized values and the sum of them is 1.0, and 4) it easily extends the simplified fuzzy reasoning method because the mode transition probabilities have the form of a matrix.

To verify the performance of the proposed algorithm, airborne target tracking has been performed. The simulation results have shown that the FIMM algorithm solves all problems in the real system application of the IMM based algorithm. With the Monte Carlo simulation, the results have guaranteed the performances of the FIMM algorithm.

REFERENCES

- [1] H. A. P. Blom and Y. Bar-Shalom, "The interacting multiple model algorithm for systems with a jump-linear smoothing application," *IEEE Trans. on Automatic Control*, vol. AC-33, no. 8, pp. 780-783, 1988.
- [2] Y. Bar-Shalom, K. C. Chan, and H. A. P. Bloom, "Tracking a manoeuvring target using input estimation versus the interacting multiple model algorithm," *IEEE Trans. on Aerospace and Electronic Systems*, vol. AES-25, pp. 296-300, 1989.
- [3] Y. Bar-Shalom and X. Li, *Estimation and Tracking: Principles, Techniques, and Software*, Artech House, Norwood, MA, USA, 1993.
- [4] R. A. Singer, "Estimating optimal tracking filter performance for manned manoeuvring targets," *IEEE Trans. on Aerospace and Electronic System*, vol. AES-6, no. 4, pp. 473-483, 1970.
- [5] A. Munir and P. Artherton, "Adaptive interacting multiple model algorithm for tracking a maneuvering target," *IEE Proceedings - Radar, Sonar and Navigation*, vol. 142, no. 1, pp. 11-17, 1995.
- [6] L. X. Wang, *A Course in Fuzzy Systems and Control*, Prentice Hall, 1998.
- [7] B. J. Lee, Y. H. Joo, and J. B. Park, "An intelligent tracking method for a maneuvering target," *International Journal of Control, Automation, and Systems*, vol. 1, no. 1, pp. 93-100, 2003.
- [8] L. Campo, P. Mookerjee, and Y. Bar-Shalom, "State estimation for systems with sojourn-time-dependent markov model switching," *IEEE Trans. on Automatic Control*, vol. 36, no. 2, pp. 238-243, 1991.
- [9] T. Takagi and M. Sugeno, "Fuzzy identification of system and its applications to modeling and control," *IEEE Trans. on Man and Cybernetics*, vol. SMC-15, pp. 116-132, 1985.
- [10] H. S. Kim and Y. K. Shin, "Design of adaptive fuzzy sliding mode controller based on fuzzy basis function expansion for ufv depth control," *International Journal of Control, Automation, and Systems*, vol. 3, no. 2, pp. 217-224, 2005.
- [11] D. Zuo, C. Han, Z. Lin, H. Zhu, and H. Hong, "Fuzzy multiple model tracking algorithm for manoeuvring target," *Proc. of the Fifth International Conference on Information Fusion*, vol. 2, pp. 818-823, July 2002.
- [12] H. S. Kim, I. S. Kim, and S. Y. Chun, "Design of fuzzy interacting multiple model algorithm for maneuvering target tracking," *Proc. of the 30th Annual Conference of the IEEE Industrial Electronics Society*, pp. 2092-2097, November 2004.



vehicle control, and target tracking.

Hyun-Sik Kim received the B.S., M.S., and Ph.D. degrees in Electrical Engineering from Pusan National University, Korea in 1994, 1996 and 2001, respectively. He is now a Senior Researcher at the Agency for Defense Development. His research interests include intelligent control, evolutionary algorithms, robotics, underwater



communication, and target tracking.

Seung-Yong Chun received the B.S. and M.S. degrees in Electronic Engineering from Kyungpook National University, Korea in 1988 and 1990, respectively. He is now a Senior Researcher at the Agency for Defense Development. His research interests include digital signal processing, array signal processing, underwater commu-